

Raddec International Updates

Rich Marsh



New Pyrolyser Mini-3 Duo system

Three worktube system for increased sample capacity.

Optimised for restrictive operating environments (e.g. fume cupboards, glove boxes)


Three solenoid-controlled gases as standard.



Furnace unit internal layout Customisable to installation location...

D – 450 mm, H – 500 mm, W – 485 mm

Worktube
positions

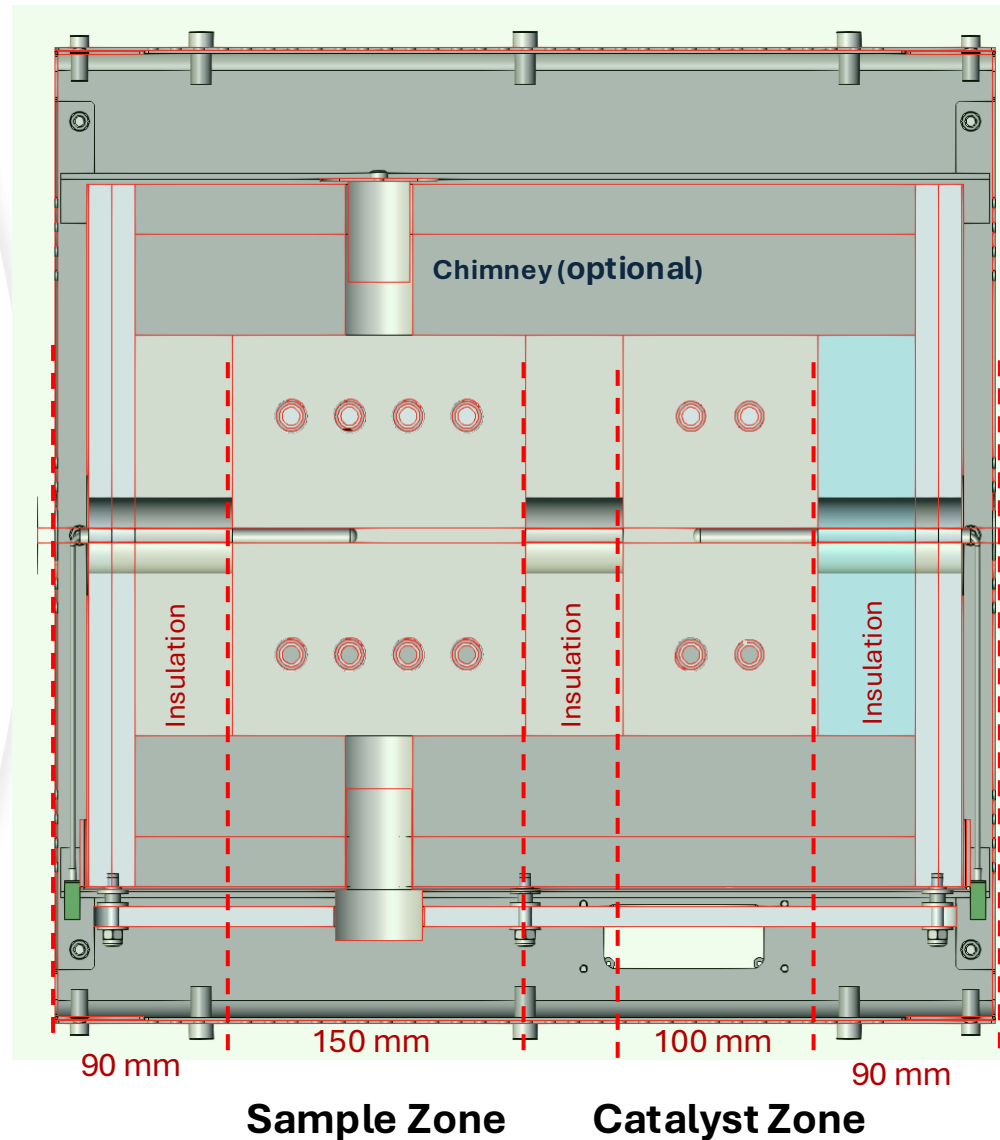

Electrical
connections

Improved Pyrolyser Mini-1 Duo

- Compact furnace size – customisable mounting frame.
- Eurotherm Nanodac full colour controller
- Three solenoid controlled gases





Gen IV system updates

- Upgraded Siemens S7 1200 safety PLC combined with S1000 Comfort HMI
- Robust cyber security compliance
- Improved cooling fan configuration

Custom glassware production

